



Prowadnica kulkowa push to open H45
 Ball bearing slide push to open H45
 Шариковая направляющая push to open H45



Możliwość zastosowania stabilizatora
 PB-D-P20STAB
 Can be used with stabilizer
 PB-D-P20STAB
 Возможность использования стабилизатора
 PB-D-P20STAB

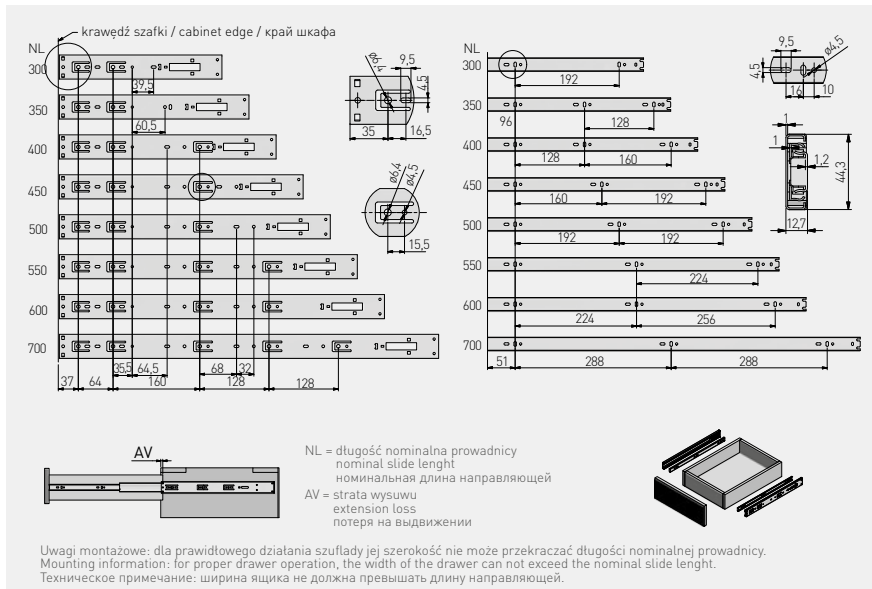

	L mm	AV mm		kg			
PK-P-0H45-300A	300*	20	pełny full полное	25	ocynk galvanized гальваника	stal steel сталь	15
PK-P-0H45-350A	350						
PK-P-0H45-400A	400						
PK-P-0H45-450A	450						
PK-P-0H45-500A	500						
PK-P-0H45-550A	550						
PK-P-0H45-600A	600	10					
PK-P-0H45-700A	700						

* Brak pełnego wysuwu / Not full extension / Неполное выдвигание

